

REMOVING - REFITTING : AUDIO AMPLIFIER

ESSENTIAL : Observe the safety and cleanliness recommendations ⓘ .

Key : **Operation symbols** ⓘ .

1. Location

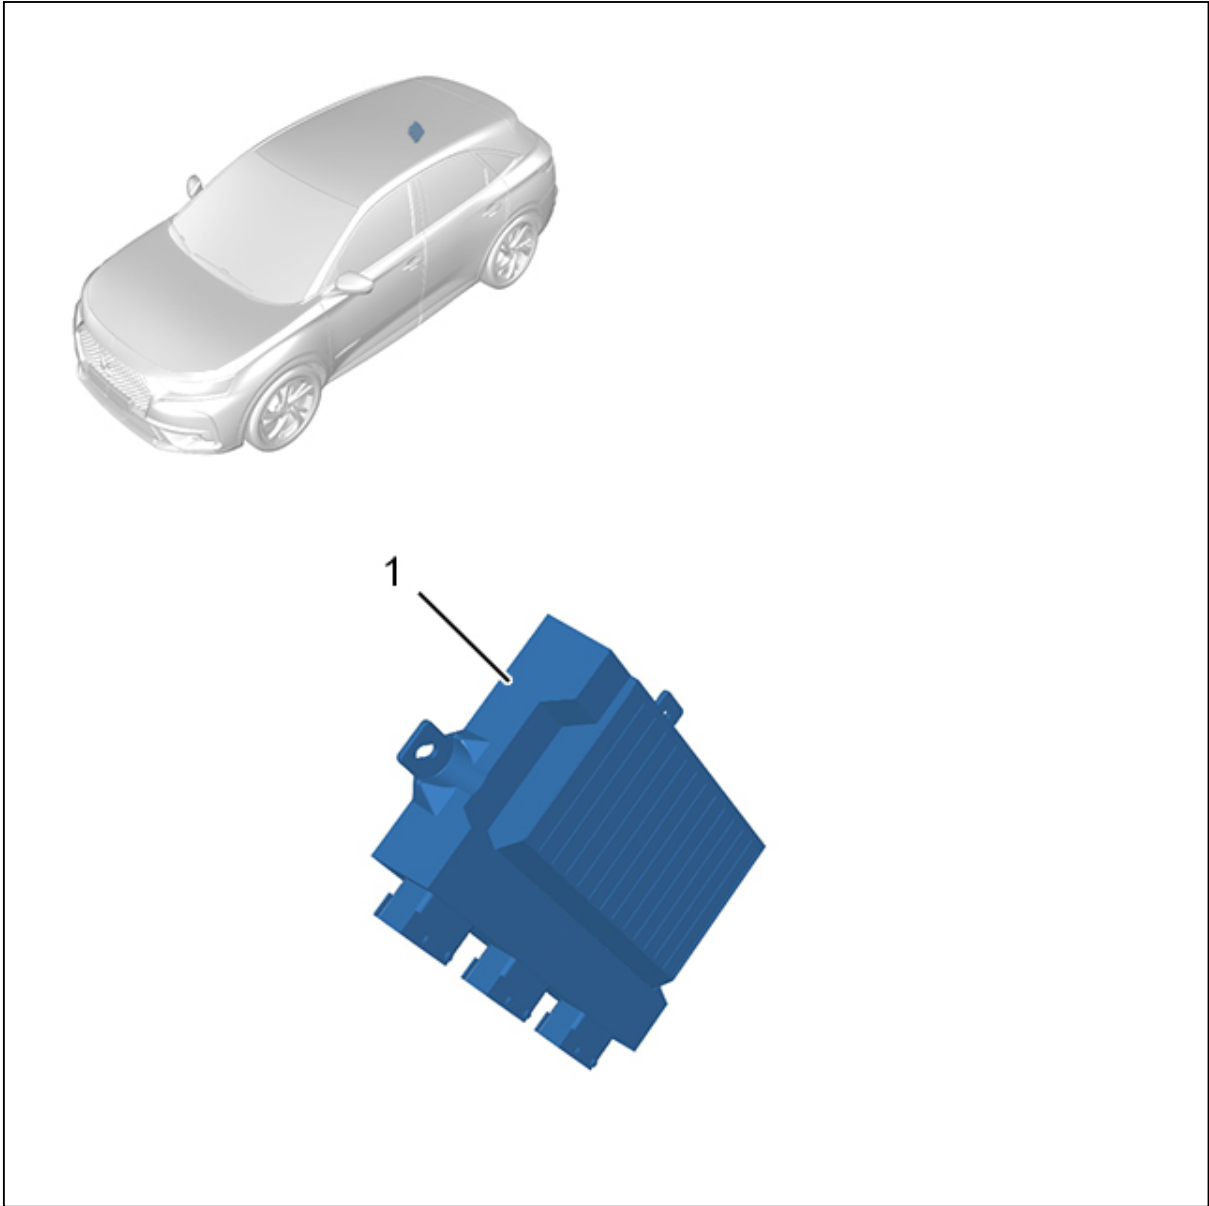



Figure : D5AG0S8P

Identification	Description	Quantity
(1)	Audio amplifier	1

2. Preliminary operations

Disconnect the ancillaries battery ⓘ .
Remove the boot side trim.

3. Removing



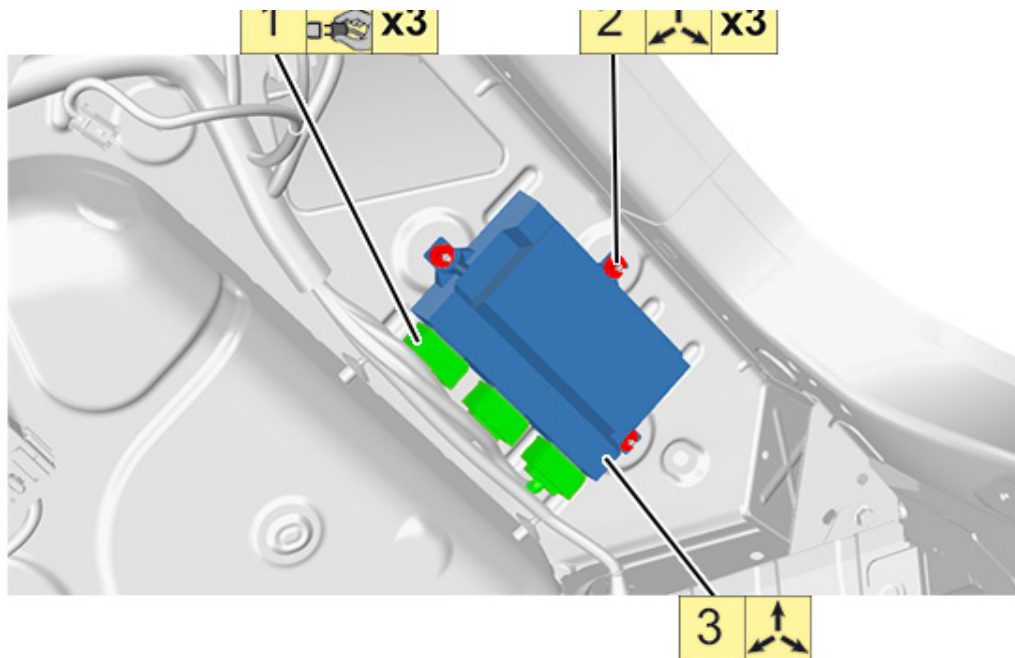


Figure : D5AG0S9D

4. Refitting

Proceed in the reverse order to removal.

5. Additional operations

Refit the boot side trim.

CAUTION : Perform the operations that are required prior to a disconnection of the ancillaries battery ⓘ.

Reconnect the ancillaries battery.

Check the operation of the various equipment.